

Computer Networks


IP: Internet Protocol

Based on Computer Networking, 4th Edition by Kurose and Ross

Stan Kurkovsky


The Internet Network layer

Host, router network layer functions:

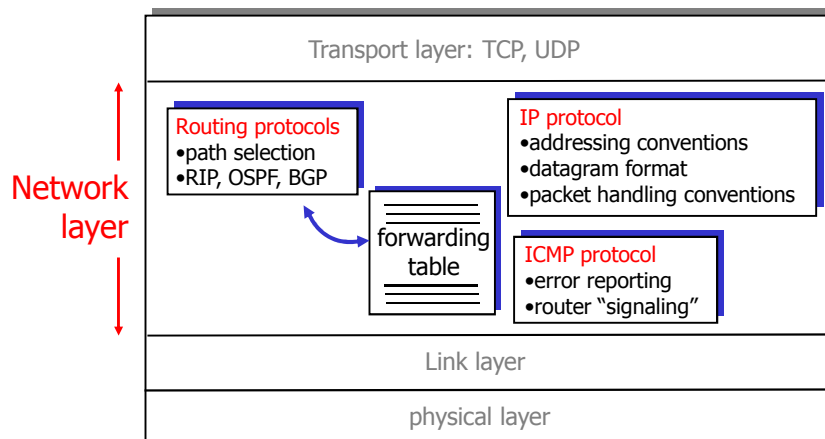

Stan Kurkovsky


IP datagram format

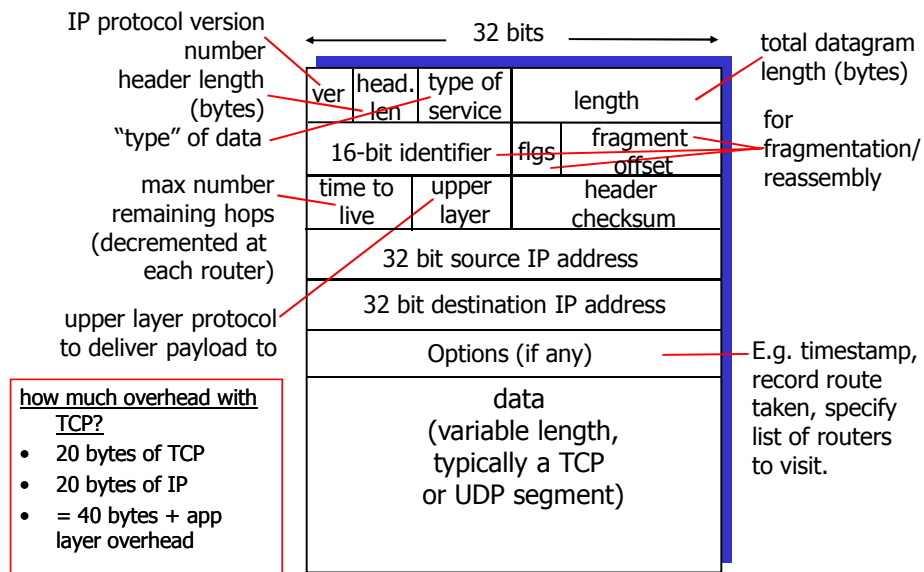

Stan Kurkovsky

IP Fragmentation and Reassembly

- network links have MTU (max.transfer size) - largest possible link-level frame.
 - different link types, different MTUs
 - Ethernet: 1500 bytes
 - Some WANs: 576 bytes
- large IP datagram divided ("fragmented") within net
 - one datagram becomes several datagrams
 - "reassembled" only at final destination
 - IP header bits used to identify, order related fragments

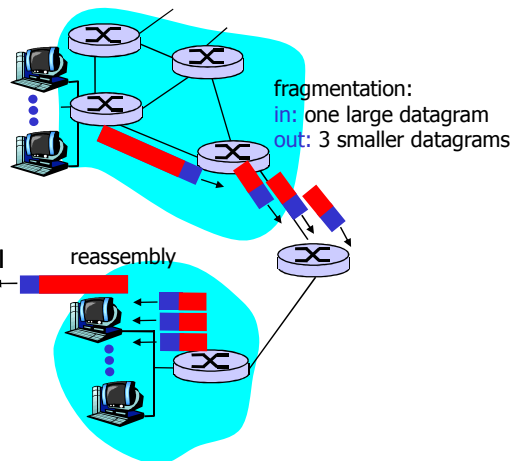

Stan Kurkovsky

IP Fragmentation and Reassembly

Example

- 4000 byte datagram
- MTU = 1500 bytes

1480 bytes in data field

offset = 1480/8

length	ID	fragflag	offset
=4000	=x	=0	=0


One large datagram becomes several smaller datagrams

length	ID	fragflag	offset
=1500	=x	=1	=0
=1500	=x	=1	=185
=1040	=x	=0	=370

Stan Kurkovsky

IP Addressing: introduction

- **IP address:** 32-bit identifier for host, router *interface*
- **interface:** connection between host/router and physical link
 - router's typically have multiple interfaces
 - host typically has one interface
 - IP addresses associated with each interface

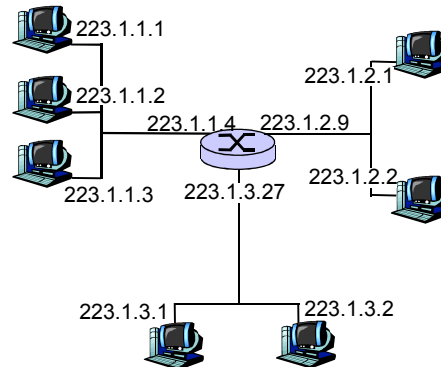


223.1.1.1 = $\underbrace{11011111}_{223} \underbrace{00000001}_1 \underbrace{00000001}_1 \underbrace{00000001}_1$

Stan Kurkovsky

Subnets

- IP address:
 - subnet part (high order bits)
 - host part (low order bits)
- *What's a subnet ?*
 - device interfaces with same subnet part of IP address
 - can physically reach each other without intervening router

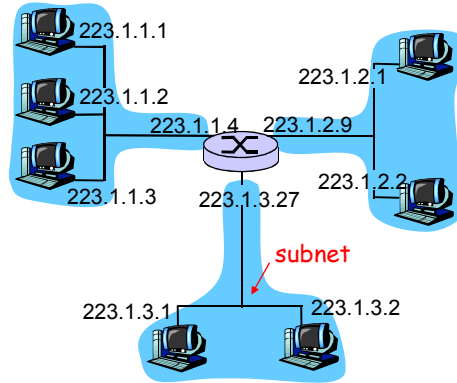


network consisting of 3 subnets

Stan Kurkovsky

Subnets

Recipe


- To determine the subnets, detach each interface from its host or router, creating islands of isolated networks. Each isolated network is called a **subnet**.
- Subnet mask: number of leftmost bits in IP addresses that define the subnet address

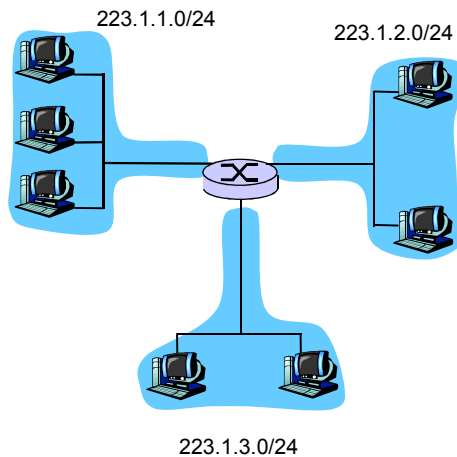

Subnet mask: /24

Stan Kurkovsky

How many subnets?

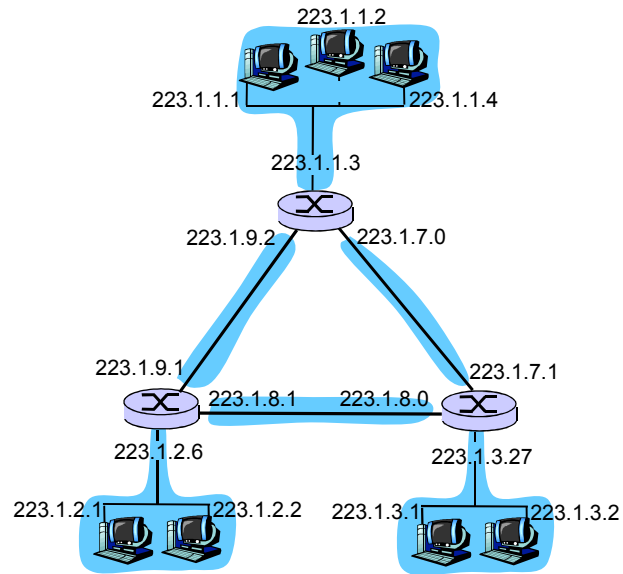


Stan Kurkovsky

IP addressing: CIDR

CIDR: Classless InterDomain Routing

- subnet portion of address of arbitrary length
- address format: **a.b.c.d/x**, where x is # bits in subnet portion of address
- pronounced *cider*

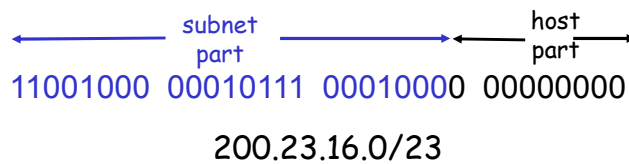

Stan Kurkovsky

IP addresses: how to get one?

Q: How does *host* get IP address?

- hard-coded by system admin in a file
 - Wintel: control-panel->network->configuration->tcp/ip->properties
 - UNIX: /etc/rc.config
- **DHCP: Dynamic Host Configuration Protocol:** dynamically get address from as server
 - "plug-and-play"

Q: How does *network* get subnet part of IP addr?

A: gets allocated portion of its provider ISP's address space

ISP's block	<u>11001000</u>	<u>00010111</u>	<u>00010000</u>	00000000	200.23.16.0/20
Organization 0	<u>11001000</u>	<u>00010111</u>	<u>00010000</u>	00000000	200.23.16.0/23
Organization 1	<u>11001000</u>	<u>00010111</u>	<u>00010010</u>	00000000	200.23.18.0/23
Organization 2	<u>11001000</u>	<u>00010111</u>	<u>00010100</u>	00000000	200.23.20.0/23
...
Organization 7	<u>11001000</u>	<u>00010111</u>	<u>00011110</u>	00000000	200.23.30.0/23

Stan Kurkovsky

DHCP: Dynamic Host Configuration Protocol

Goal: allow host to *dynamically* obtain its IP address from network server when it joins network

Can renew its lease on address in use

Allows reuse of addresses (only hold address while connected an "on"

Support for mobile users who want to join network (more shortly)


DHCP overview:

- host broadcasts "DHCP discover" msg
- DHCP server responds with "DHCP offer" msg
- host requests IP address: "DHCP request" msg
- DHCP server sends address: "DHCP ack" msg

Stan Kurkovsky

Hierarchical addressing: route aggregation


- Hierarchical addressing allows efficient advertisement of routing information

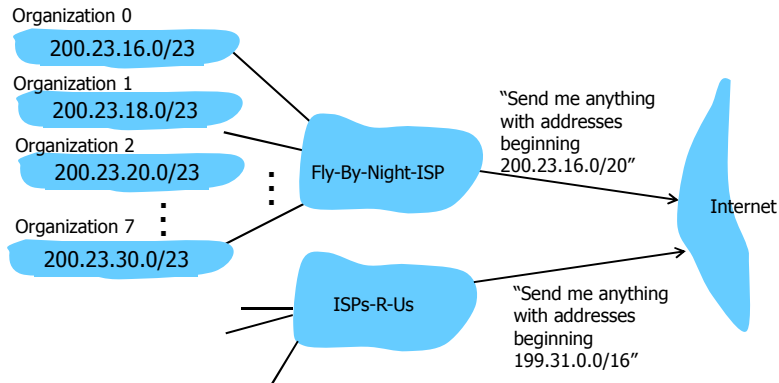

Stan Kurkovsky

Hierarchical addressing: more specific routes

- ISPs-R-Us has a more specific route to Organization 1

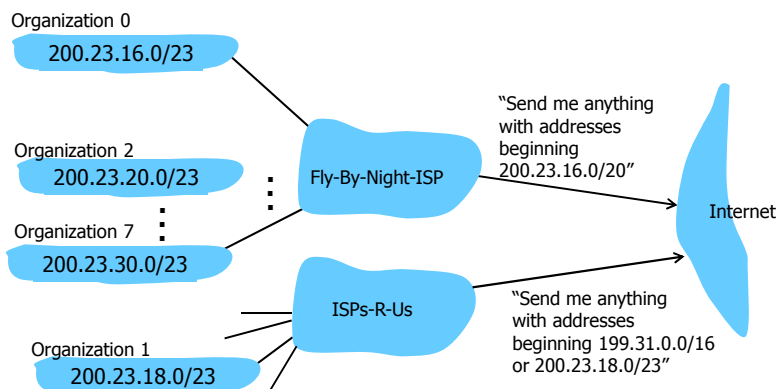

Stan Kurkovsky

IP addressing


Q: How does an ISP get block of addresses?

A: **ICANN:** Internet Corporation for Assigned Names and Numbers

- allocates addresses
- manages DNS
- assigns domain names, resolves disputes

Stan Kurkovsky

NAT: Network Address Translation

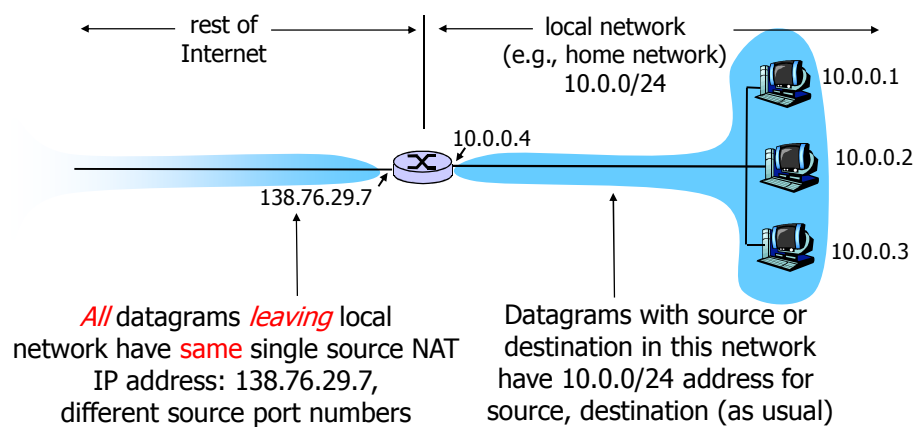


Stan Kurkovsky

NAT: Network Address Translation

- Motivation:** local network uses just one IP address as far as outside world is concerned:
 - range of addresses not needed from ISP: just one IP address for all devices
 - can change addresses of devices in local network without notifying outside world
 - can change ISP without changing addresses of devices in local network
 - devices inside local net not explicitly addressable, visible by outside world (a security plus).
- Implementation:** NAT router must:
 - outgoing datagrams:* *replace* (source IP address, port #) of every outgoing datagram to (NAT IP address, new port #)
 - ... remote clients/servers will respond using (NAT IP address, new port #) as destination addr.
 - remember (in NAT translation table)* every (source IP address, port #) to (NAT IP address, new port #) translation pair
 - incoming datagrams:* *replace* (NAT IP address, new port #) in dest fields of every incoming datagram with corresponding (source IP address, port #) stored in NAT table

Stan Kurkovsky

NAT: Network Address Translation

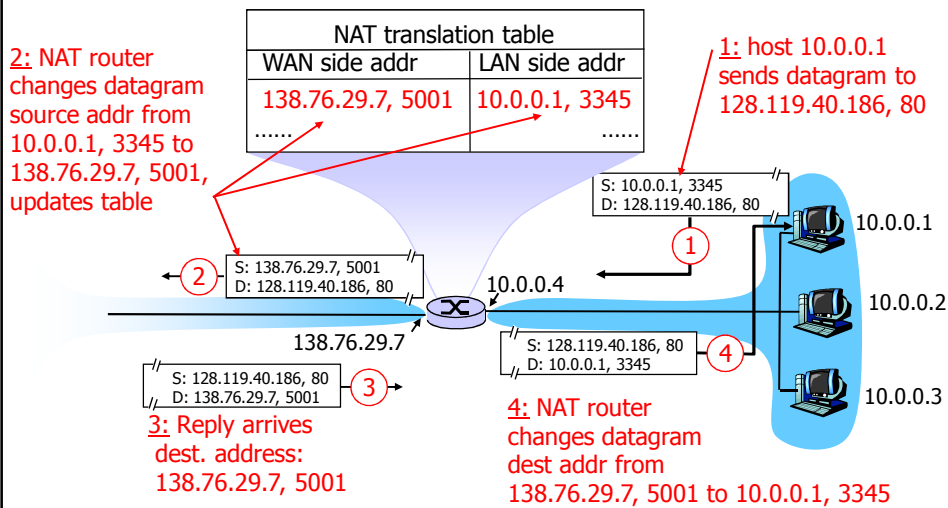

Stan Kurkovsky

NAT: Network Address Translation

- 16-bit port-number field:
 - 60,000 simultaneous connections with a single LAN-side address!
- NAT is controversial:
 - routers should only process up to layer 3
 - violates end-to-end argument
 - NAT possibility must be taken into account by app designers, eg, P2P applications
 - address shortage should instead be solved by IPv6

Stan Kurkovsky

ICMP: Internet Control Message Protocol

	<u>Type</u>	<u>Code</u>	<u>description</u>
• used by hosts & routers to communicate network-level information	0	0	echo reply (ping)
	3	0	dest. network unreachable
• error reporting: unreachable host, network, port, protocol	3	1	dest host unreachable
	3	2	dest protocol unreachable
• echo request/reply (used by ping)	3	3	dest port unreachable
	3	6	dest network unknown
• network-layer "above" IP:	3	7	dest host unknown
• ICMP msgs carried in IP datagrams	4	0	source quench (congestion control - not used)
• ICMP message: type, code plus first 8 bytes of IP datagram causing error	8	0	echo request (ping)
	9	0	route advertisement
	10	0	router discovery
	11	0	TTL expired
	12	0	bad IP header

Stan Kurkovsky

Traceroute and ICMP

- Source sends series of UDP segments to dest
 - First has TTL =1
 - Second has TTL=2, etc.
 - Unlikely port number
- When nth datagram arrives to nth router:
 - Router discards datagram
 - And sends to source an ICMP message (type 11, code 0)
 - Message includes name of router& IP address
- When ICMP message arrives, source calculates RTT
- Traceroute does this 3 times

Stopping criterion

- UDP segment eventually arrives at destination host
- Destination returns ICMP "host unreachable" packet (type 3, code 3)
- When source gets this ICMP, stops.


Stan Kurkovsky

IPv6

- **Initial motivation:** 32-bit address space soon to be completely allocated.
- Additional motivation:
 - header format helps speed processing/forwarding
 - header changes to facilitate QoS
- **IPv6 datagram format:**
 - fixed-length 40 byte header
 - no fragmentation allowed

IPv6 Header

- **Priority:** identify priority among datagrams in flow
- **Flow Label:** identify datagrams in same "flow" (concept of "flow" not well defined).
- **Next header:** identify upper layer protocol for data

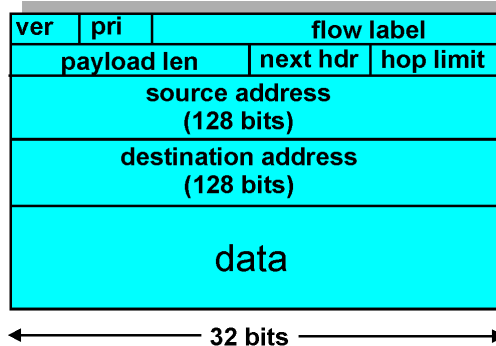

Stan Kurkovsky

IPv4 vs IPv6

Other Changes


- **Checksum:** removed entirely to reduce processing time at each hop
- **Options:** allowed, but outside of header, indicated by "Next Header" field
- **ICMPv6:** new version of ICMP
 - additional message types, e.g. "Packet Too Big"
 - multicast group management functions

Transitioning to IPv6

- Not all routers can be upgraded simultaneously
 - no "flag days"
 - How will the network operate with mixed IPv4 and IPv6 routers?
- **Tunneling:** IPv6 carried as payload in IPv4 datagram among IPv4 routers

Stan Kurkovsky

Tunneling

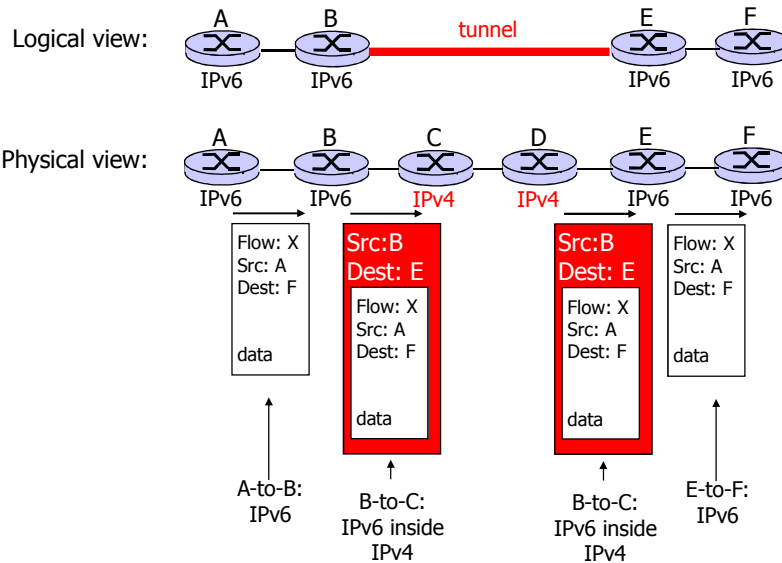

Stan Kurkovsky